

max. operating torque series SM 88 with WSE xx.230AC 17



SM 168

SM 107


SM 87/88

SM 56


All printed torque performance curves are measured with **STÖGRA drives** type WSE xx.230AC (320VDC).

- rectangular current characteristics
- - - - - rectangular current characteristics with 20% boost
- sinus current characteristics


SM 107.1.18M4 mit with 04.230AC

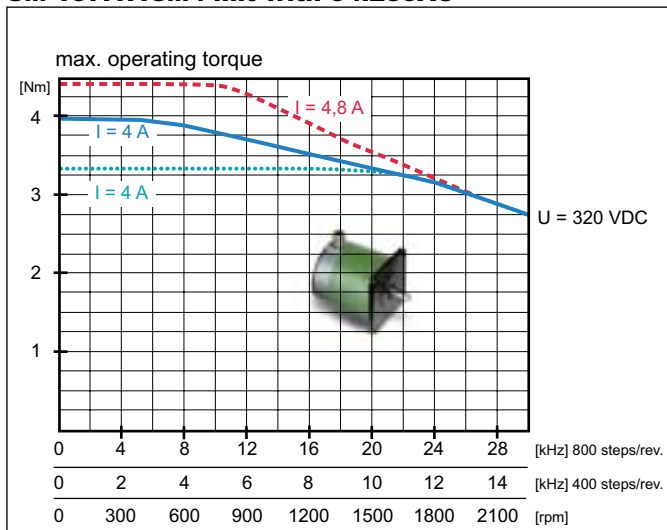

SM 107.2.18M4 with WSE 04.230AC

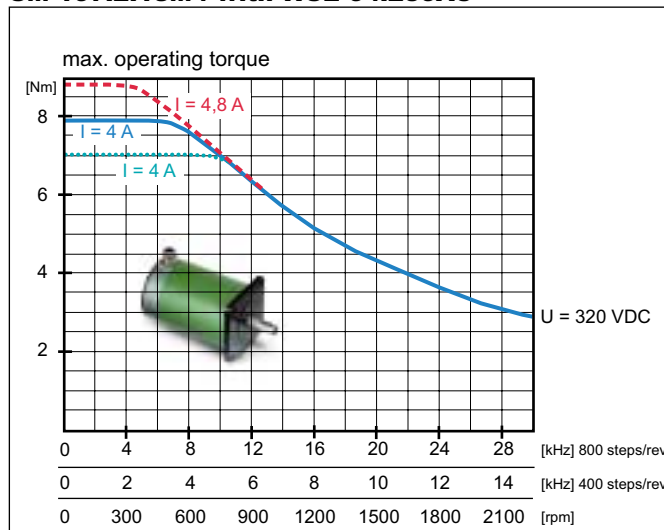

SM 107.3.18M6 with WSE 06.230AC

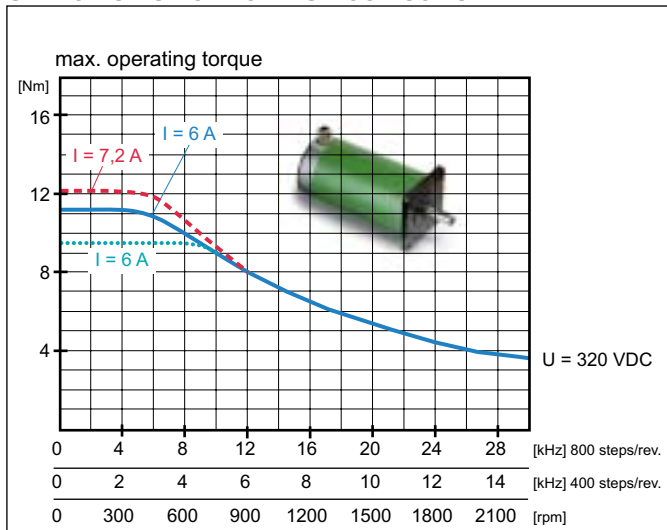

SM 107.4.18M6 with WSE 06.230AC

